

RX63 & RX72 Scissor Lifts

Low-profile, high-capacity

NEW & UPDATED



RX63 & RX72 Scissor Lifts

*Massive capacity
with a small footprint*

STANDARD

Extra-wide runways



- ✓ 660 mm (26 in.) runways accept wide, heavy vehicles

OPTIONAL

Stainless steel turnplates



- ✓ Maximum corrosion resistance for long life
- ✓ Optional PowerSlide® turnplates (shown) lock/unlock automatically

STANDARD

Integrated air line



- ✓ Convenient air source for tools at front and rear

PATENTED

Sensor feedback system*



- ✓ Sensors keep runway level
- ✓ Safely stops if obstructed


STANDARD

Velocity safety fuses




- ✓ Instantaneous shutdown in event of hydraulic failure

Low drive-on and high raise height



- ✓ Only 273 mm (10.75 in.) fully lowered



- ✓ Comfortable 1828 mm (72 in.) maximum height

- ✓ Reduces clearance issues

* Shown with protective cover removed

OPTIONAL


Two Swing Air Jacks



- ✓ 4080-kg (9000-lb.) capacity
- ✓ Technicians' favorite

EXCLUSIVE

Louvered ramps

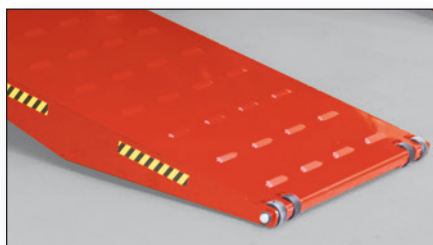

- ✓ Prevent wheel spin in wet conditions
- ✓ More effective than diamond tread or abrasive strips

PATENTED

Control panel



- ✓ Complete operation from the console
- ✓ Optional PowerSlide® Inflation Station and FIA control



RX63KIS-435E shown with optional light kit, Swing Air Jacks, and front turnplates

STANDARD

Safety locks



- ✓ Precision-fit teeth lock runways at 16 level height positions

EXCLUSIVE

Movable work steps



- ✓ 10 secure positions
- ✓ Lightweight design

PATENTED

OPTIONAL

Inflation Station



- ✓ Automatically fills or bleeds each tire
- ✓ No dangling air lines

Exclusive features, enhanced capabilities

EXCLUSIVE

Fast descent speed

- ✓ 50% faster lowering times
- ✓ Ensures a soft landing by automatically slowing the last several inches

**FAST
Descent**

0:25

0:50

Others



OPTIONAL

Swing Air Jacks

- ✓ Lift vehicles off the runways during alignment procedures and other multi-service operations
- ✓ 4080-kg (9,000-lb.) capacity
- ✓ Folding design provides lowest-profile

133-84-1 — 4080-kg (9000-lb.) Capacity Swing Air Jack

EXCLUSIVE

RX72K flush-mount

- ✓ Accommodate lowered vehicles or expensive spoilers
- ✓ Ideal for “showcase” shops
- ✓ Drive-thru capability



EXCLUSIVE **OPTIONAL**

AlignLights system

- ✓ Bright and efficient LED light source underneath the vehicle
- ✓ Automatically turns on when the lift is raised and turns off when the lift is lowered to the floor
- ✓ AlignLights is an ALI-listed accessory

20-3438-1 — AlignLights system



Standard equipment

- ✓ Flush-mounted, full-floating slipplates (PowerSlide® slipplates on PS and IS models)
- ✓ Two movable work steps (not included with flush-mount installations)
- ✓ Louvered ramps with built-in wheel stops
- ✓ Approach ramp extension kit – 305 mm (12 in.)
- ✓ Front wheel stops
- ✓ Two wheel chocks
- ✓ Built-in, full-length jack rails
- ✓ Built-in air line kit

OPTIONAL


Extension kits

Approach ramp extensions

Extensions lessen the ramp incline for high-floor-slope installs and ease service for specialty vehicles.



432 mm (17 in.) kit – 20-3113-1
Adds 127 mm (5 in.) to RX63K



1016 mm (40 in.) kit* – 20-2169-1
Adds approximately 711 mm (28 in.) to RX63K

1270 mm (50 in.) kit* – 20-2189-1
Adds approximately 965 mm (38 in.) to RX63K

* Quick-release pins included.

Wheel stop extension

Provides additional space for conventional sensors and vehicles with low spoilers.



20-2497-1
Adds approximately 305 mm (12 in.) to RX63K

Drive-thru conversion*




1320 mm (52 in.) kit
20-2498-1 For camera sensors

1600 mm (63 in.) kit
20-2501-1 For conventional sensors

Hunter offers two fully integrated options to enhance productivity



FIA allows WinAlign® aligners to control the lift features for ultimate productivity. Two patented designs offer greater flexibility and time-saving capabilities.

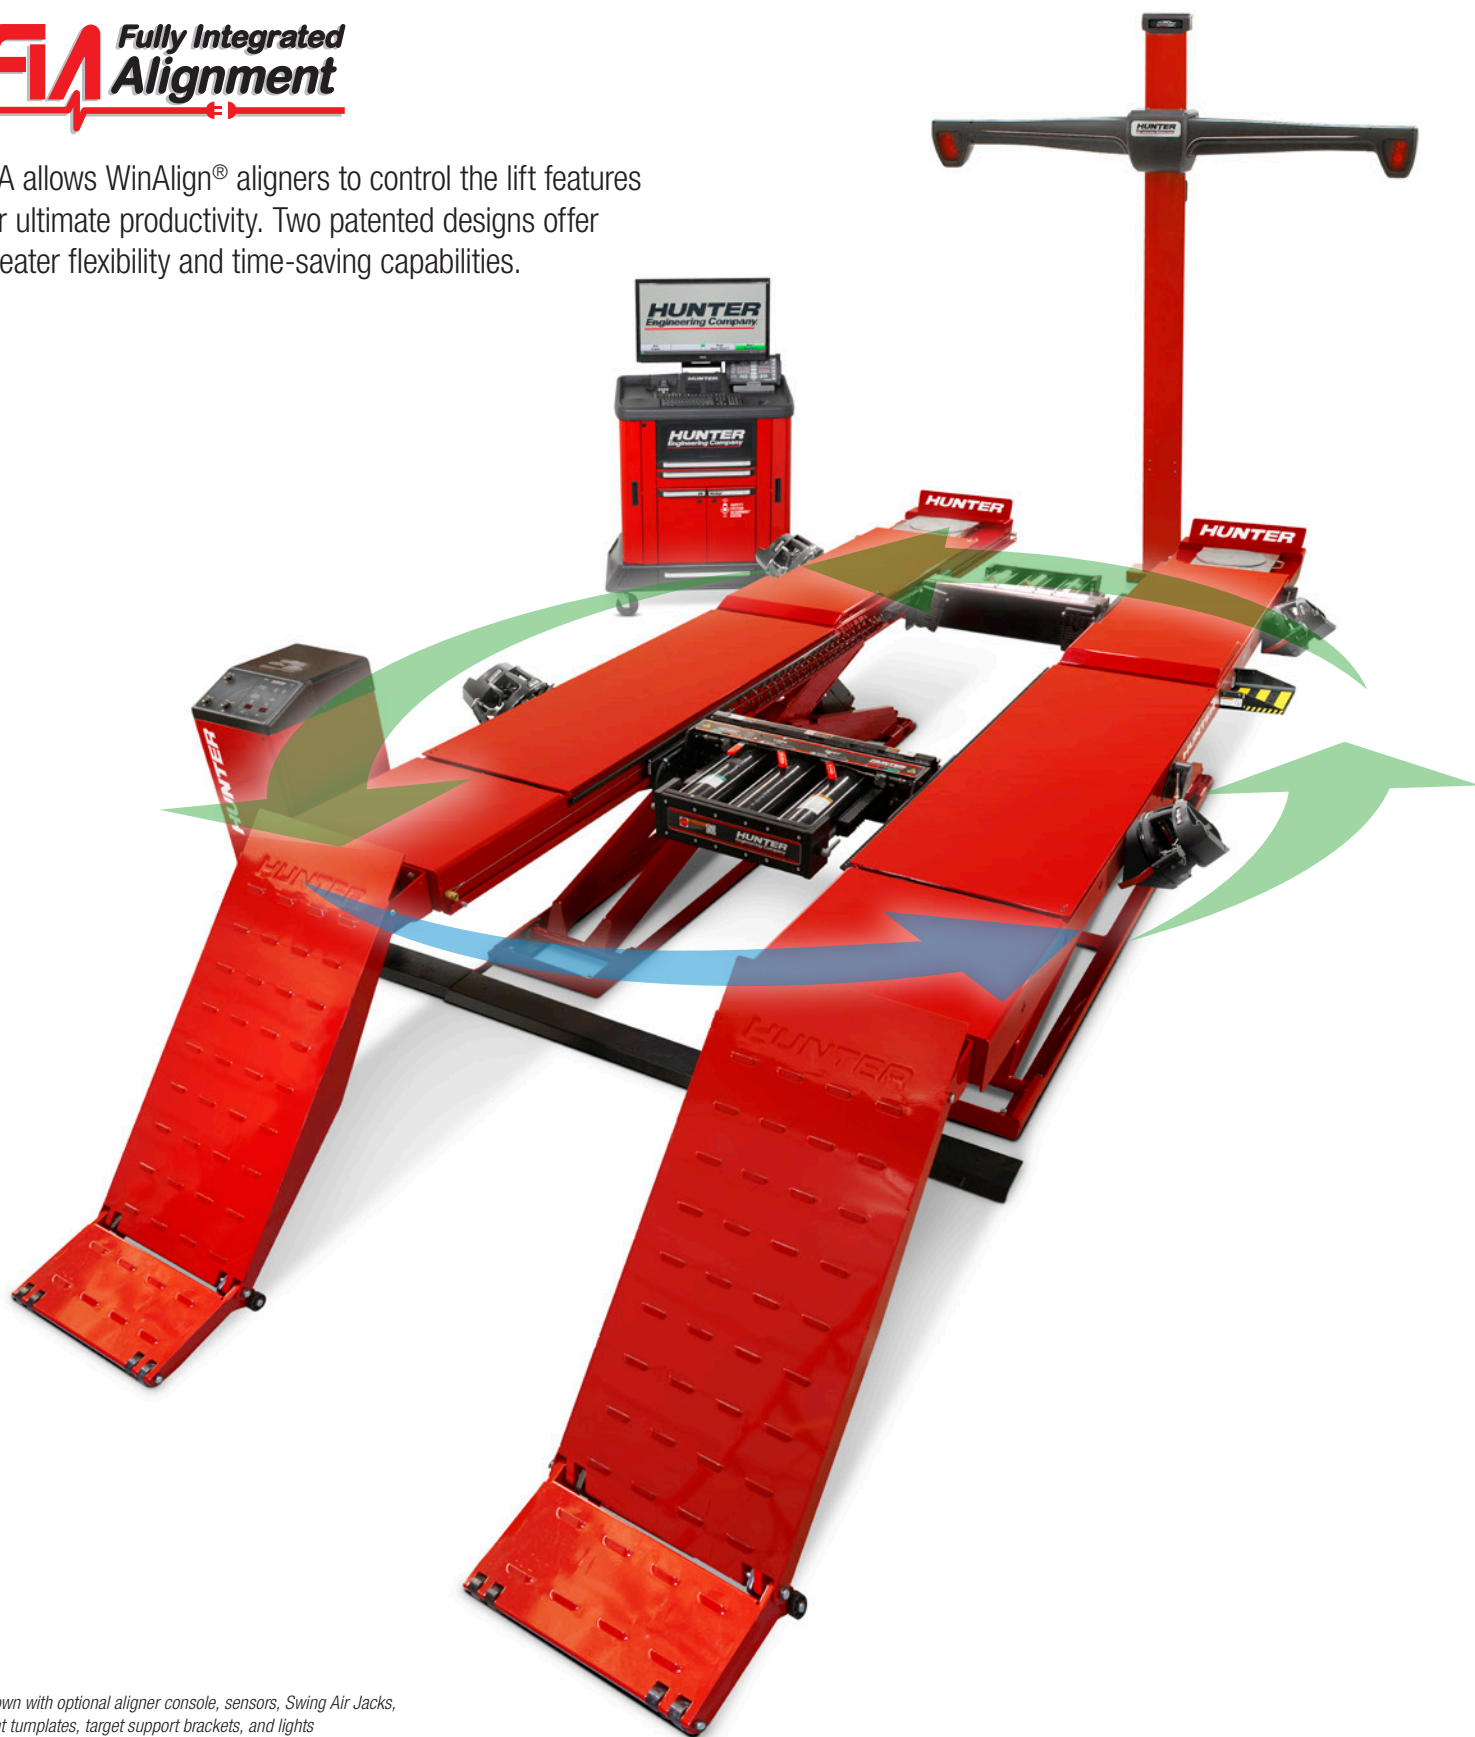

Shown with optional aligner console, sensors, Swing Air Jacks, front templates, target support brackets, and lights



PATENTED

PowerSlide® edition


- ✓ Locks slipplates and turnplates with the touch of a button or automatically through an FIA-equipped aligner*
- ✓ No more struggles with lock pins
- ✓ Avoid wear and tear and extend the life of your turnplates



OPTIONAL




OPTIONAL

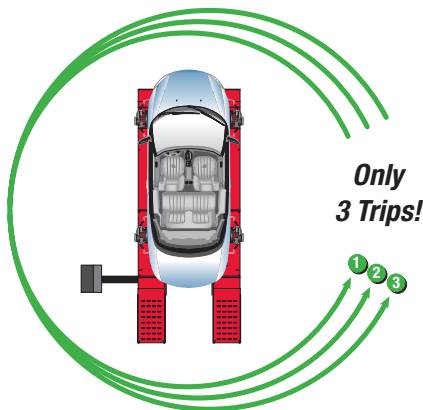

Minimize trips around the car

- 1 Mount targets
- 2 Make adjustments
- 3 Remove targets
- 4 Jack vehicle and compensate sensors
- 5 Lower leveling legs (if equipped)
- 6 Remove slipplate and turnplate pins
- 7 Replace slipplate and turnplate pins
- 8 Raise leveling legs (if equipped)


Yesterday's Technology

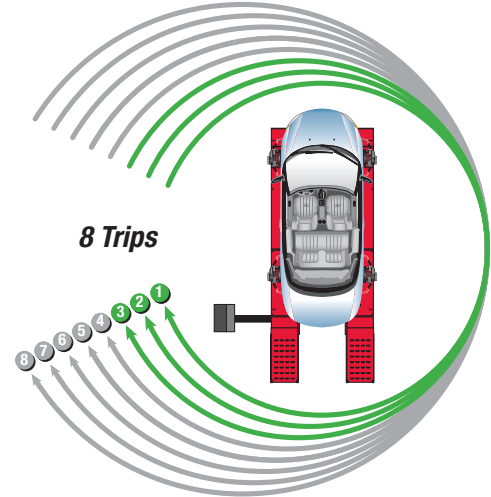

PATENTED

Inflation Station edition

- ✓ Includes PowerSlide® slipplates and turnplates
- ✓ Automatically inflate all four tires simultaneously
- ✓ Record starting and final pressure*
- ✓ Hose recoils to keep work area clear

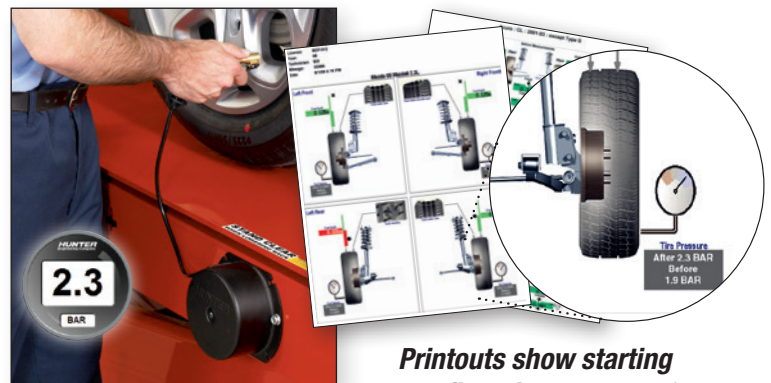


* Requires FIA equipped aligner with WinAlign® 10.x software or greater

Specifications

| | Flush-mount RX72KF | Surface-mount RX63K |
|----------------------------------|--|-------------------------|
| Max. vehicle weight | 7257 kg (16000 lbs.) | 6350 kg (14000 lbs.) |
| Max. wheelbase | | |
| General service | 4749 mm (187 in.) | |
| Two-wheel alignment | 4623 mm (182 in.) | |
| Four-wheel alignment | 4013 mm (158 in.) | |
| Min. four-wheel alignment | 2235 mm (88 in.) | |
| Lowered height | N/A | 273 mm (10.75 in.) |
| Max. lifting height | 1803 mm (71 in.) | 1828 mm (72 in.) |
| Alignment height | All lock positions | |
| Runway width | 660 mm (26 in.) | |
| Tread width | | |
| Min. inside | 1016 mm (40 in.) | |
| Max. outside | 2337 mm (92 in.) | |
| Air pressure | 6.2-10.3 bar (90-150 psi)* | |
| Speed | 60 seconds (raise) 25 seconds (descent) | |

* 8.6 bar (125 psi) required for full jack capacity

RX63K Plan View

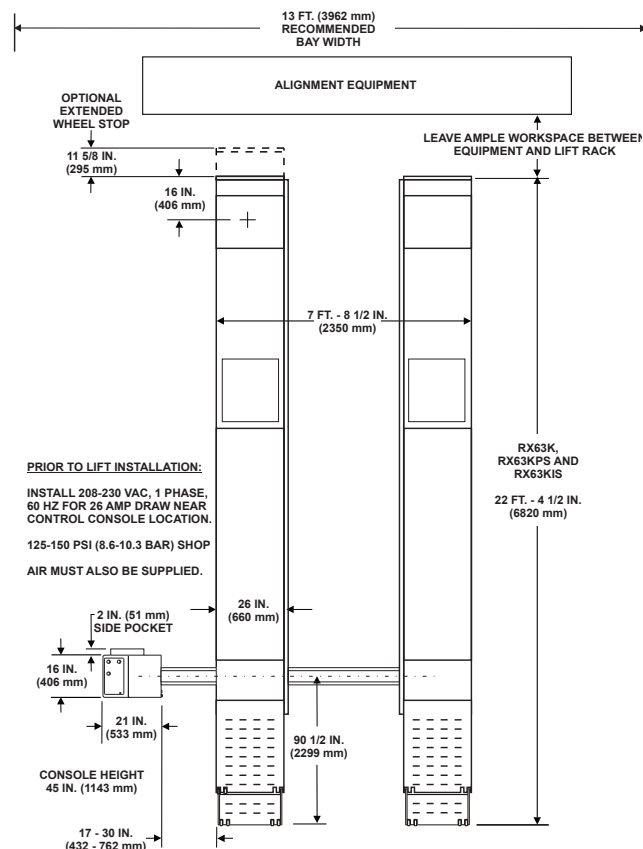

See your Hunter Sales Representative for details on site requirement.

Models

| | RX72KFIS | RX63KIS | RX72KFPS | RX63KPS | RX72KF | RX63K |
|----------------------------|----------|---------|----------|---------|--------|-------|
| Fully Integrated Alignment | ✓ | ✓ | ✓ | ✓ | | |
| Inflation Station | ✓ | ✓ | | | | |
| PowerSlide® slipplates | ✓ | ✓ | ✓ | ✓ | | |
| Flush-mounted | ✓ | | ✓ | | ✓ | |

Add one of the following suffixes to the desired model number listed above (ex. RX72K-**435E**):

| Suffix | Power configuration |
|--------------|-----------------------------|
| -215E | 208/230V, 1PH, 50Hz |
| -216E | 208/230V, 1PH, 60Hz |
| -435E | 208/230/400/460V, 3PH, 50Hz |

Because of continuing technological advances, specifications, models and options are subject to change without notice.

PowerSlide and WinAlign are registered trademarks of Hunter Engineering Company.
The PowerSlide logo is a trademark of Hunter Engineering Company.

0418AH

Copyright © 2018, Hunter Engineering Company

HUNTER
Engineering Company

www.hunter.com

11250 Hunter Drive, Bridgeton, MO 63044, USA
Tel: +1-314-731-3020, Fax: +1-314-731-0132
Email: international@hunter.com

Form 7473-TE-05, 04/18